
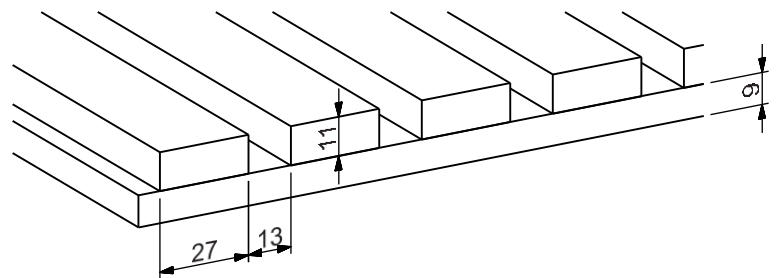


Acoustic panels

The wood shop's acoustic panels consist of 9 mm PET Polyester non-woven fabric, on which 27 x 11 mm mouldings in solid-coloured MDF finished real wood veneer are mounted. The strips are spaced 13 mm apart.

Properties of real wood veneer:

Real wood veneer can vary in colour, vein structure and appearance from panel to panel.

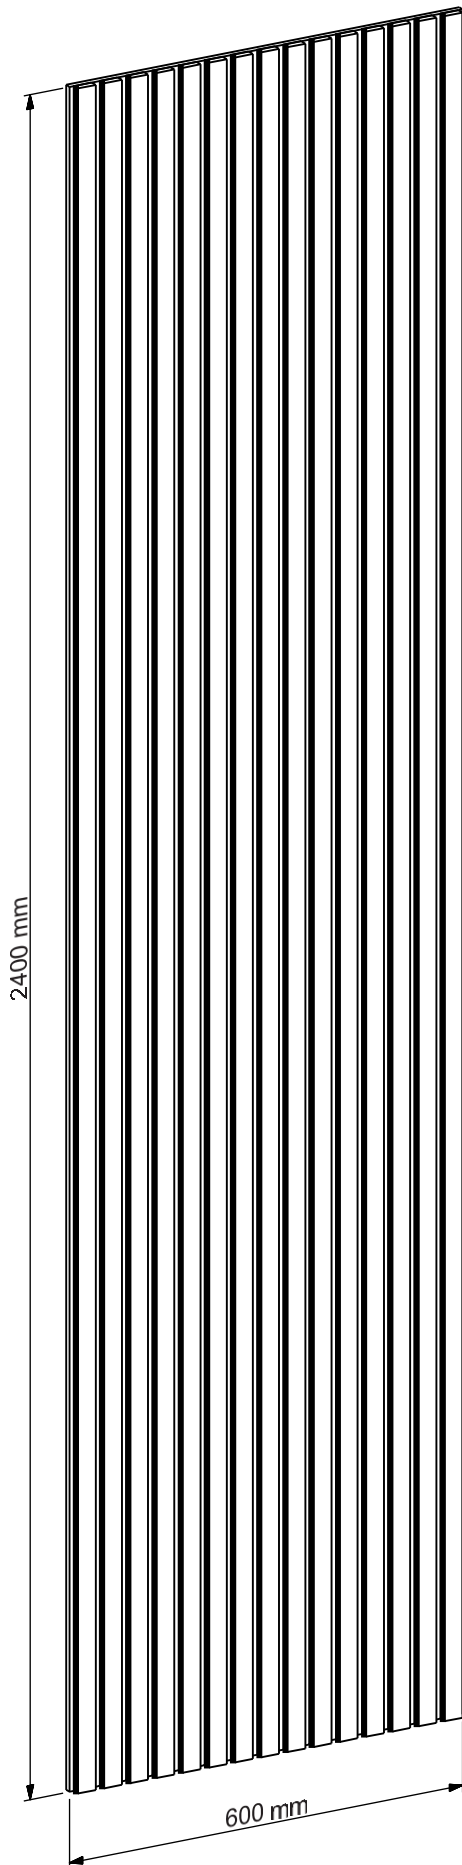

Assembly

The wood shop's acoustic panels can be used on both ceilings and walls.

It is recommended to mount the panels on 45 mm thick joists with a distance of max 600 mm. However, the panels can also be attached directly to the wall.

The screws are placed between the strips through the non-woven fabric.

For fastening, a minimum of 15 flat-head screws per panel should be used.

Screw size at least 3.5 x 35 mm.

